


Type G and GD according to DIN 808 with plain bearing




- Suitable for every application in the range of general engineering up to a maximum speed of 1000 r
- Type G precision single joint
- Type GD precision double joint
- Maximum articulation angle 45° for each joint
- Bearings designed as plain bearings
- Available with finish bore H7 – on request with keyway, hexagon bore or square bore
- Also available as clamping hub


Precision single joint G

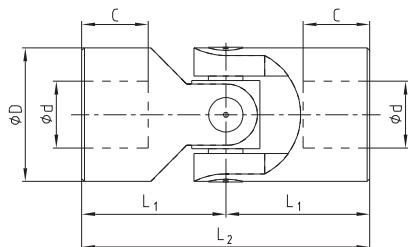

Precision double joint GD

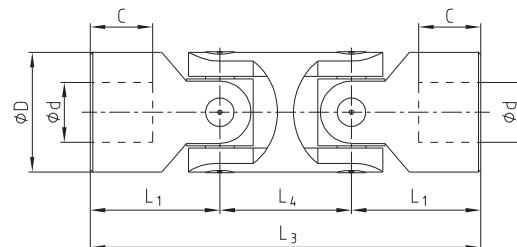

Finish bores:

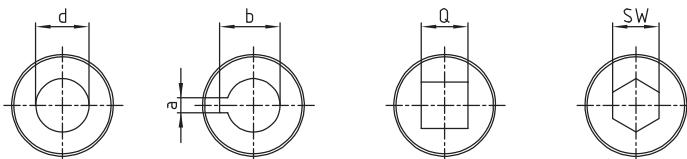

Type G and GD

Types and size															Weight [kg]	
Size G	DIN description G	Size GD	DIN description GD	d [H7]	D	L ₂	L ₁	C	L ₄	L ₃	a [JS9]	b	Q [H8]	SW [H8]	G	GD
01 G	E6 x 16-G	01 GD	D6 x 16-G	6	16	34	17	8	22	56	2	7,0	6	6	0,05	0,08
02 G	E8 x 16-G	02 GD	D8 x 16-G	8	16	40	20	11	22	62	2	9,0	8	8	0,05	0,08
03 G	E10 x 22-G	03 GD	D10 x 22-G	10	22	48	24	12	26	74	3	11,4	10	10	0,10	0,15
04 G	E12 x 25-G	04 GD	D12 x 25-G	12	25	56	28	13	30	86	4	13,8	12	12	0,16	0,25
05 G	E14 x 28-G	05 GD	D14 x 28-G	14	28	60	30	14	36	96	5	16,3	14	14	0,20	0,40
1 G	E16 x 32-G	1 GD	D16 x 32-G	16	32	68	34	16	36	104	5	18,3	16	16	0,30	0,45
2 G	E18 x 36-G	2 GD	D18 x 36-G	18	36	74	37	17	40	114	6	20,8	18	18	0,45	0,70
3 G	E20 x 42-G	3 GD	D20 x 42-G	20	42	82	41	18	46	128	6	22,8	20	20	0,60	1,00
4 G	E22 x 45-G	4 GD	D22 x 45-G	22	45	95	47,5	22	50	145	6	24,8	22	22	0,95	1,55
5 G	E25 x 50-G	5 GD	D25 x 50-G	25	50	108	54	26	55	163	8	28,3	25	25	1,20	2,00
6 G	E30 x 58-G	6 GD	D30 x 58-G	30	58	122	61	29	68	190	8	33,3	30	30	1,85	2,90
6 G1	E32 x 58-G	6 GD1	D32 x 58-G	32	58	130	65	33	68	198	10	35,3	30	30	2,00	3,00
7 G	E35 x 70-G	7 GD	D35 x 70-G	35	70	140	70	35	72	212	10	38,3	-	-	3,15	4,75
8 G	E40 x 80-G	8 GD	D40 x 80-G	40	80	160	80	39	85	245	12	43,3	-	-	4,60	7,20
9 G	E50 x 95-G	9 GD	D50 x 95-G	50	95	190	95	46	100	290	14	53,8	-	-	7,60	12,0

Ordering example:


04 G	Ø12	Ø12 keyway DIN
Size/type of joint	Finish bore (H7)	Finish bore (H7) keyway to DIN 6885 sheet 1 (JS9)

Type H and HD according to DIN 808 with needle bearing




- Suitable for every application in the range of general engineering up to a maximum speed of 4000 rpm
- Type H precision single joint
- Type HD precision double joint
- Maximum articulation angle 45°
- High dynamic load - small bearing clearance
- Maintenance-free due to needle bearing
- Available with finish bore H7 – on request with keyway, hexagon bore or square bore
- Also available as clamping hub


Precision single joint H

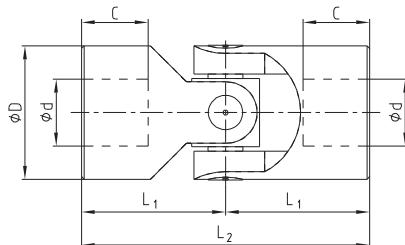

Precision double joint HD

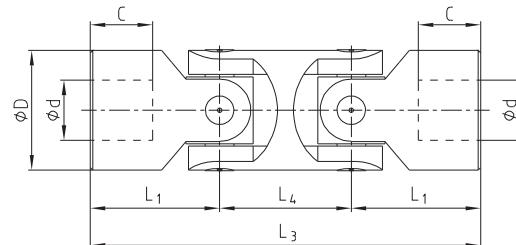

Finish bores:

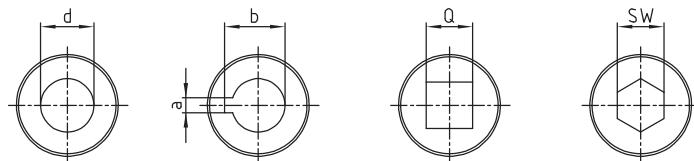

Type H and HD

Size H	Types and size			Dimensions [mm]										Weight [kg]		
	DIN description H	Size HD	DIN description HD	d [H7]	D	L2	L1	C	L4	L3	a [JS9]	b	Q [H8]	SW [H8]	H	HD
03 H	E10 x 22-W	03 HD	D10 x 22-W	10	22	48	24	12	26	74	3	11,4	10	10	0,10	0,15
04 H	E12 x 25-W	04 HD	D12 x 25-W	12	25	56	28	13	30	86	4	13,8	12	12	0,16	0,25
05 H	E14 x 28-W	05 HD	D14 x 28-W	14	28	60	30	14	36	96	5	16,3	14	14	0,20	0,40
1 H	E16 x 32-W	1 HD	D16 x 32-W	16	32	68	34	16	36	104	5	18,3	16	16	0,30	0,45
2 H	E18 x 36-W	2 HD	D18 x 36-W	18	36	74	37	17	40	114	6	20,8	18	18	0,45	0,70
3 H	E20 x 42-W	3 HD	D20 x 42-W	20	42	82	41	18	46	128	6	22,8	20	20	0,60	1,00
4 H	E22 x 45-W	4 HD	D22 x 45-W	22	45	95	47,5	22	50	145	6	24,8	22	22	0,95	1,55
5 H	E25 x 50-W	5 HD	D25 x 50-W	25	50	108	54	26	55	163	8	26,3	25	25	1,20	2,00
6 H	E30 x 58-W	6 HD	D30 x 58-W	30	58	122	61	29	68	190	8	33,3	30	30	1,85	2,90
6 H1	E32 x 58-W	6 HD1	D32 x 58-W	32	58	130	65	33	68	198	10	35,3	30	30	2,00	3,00
7 H	E35 x 70-W	7 HD	D35 x 70-W	35	70	140	70	35	72	212	10	38,3	-	-	3,15	4,75
8 H	E40 x 80-W	8 HD	D40 x 80-W	40	80	160	80	39	85	245	12	43,3	-	-	4,60	7,20
9 H	E50 x 95-W	9 HD	D50 x 95-W	50	95	190	95	46	100	290	14	53,8	-	-	7,60	12,0


Ordering example:

1 H	Ø16	Ø16 keyway DIN
Size/type of joint	Finish bore (H7)	Finish bore (H7) keyway to DIN 6885 sheet 1 (JS9)


Type GA and HA acc. to DIN 808 with plain and needle bearing (extendable)



- Precision double joint - extendable, maximum articulation angle 45° for each joint
- Bridging larger shaft distances
- Type GA (plain bearing) $n_{\max.} = 1000 \text{ rpm}$
- Type HA (needle bearing) $n_{\max.} = 4000 \text{ rpm}$
- Available with quick locking GR; HR
- Available with finish bore H7 – on request available with keyway, thread for setscrews, square or hexagon bore
- Also available as clamping hub

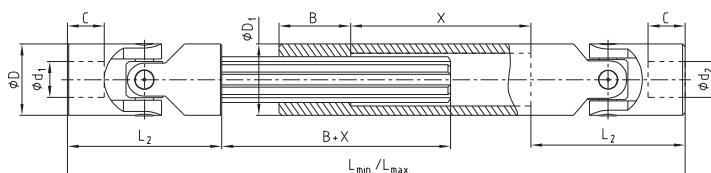

Finish bores:

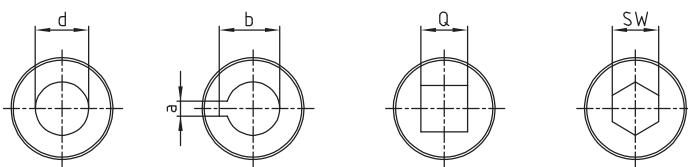

Size	Preferred lengths									
	Dimensions [mm]									
	$L_{\min.} / L_{\max.}$									
03	140 170	160 200	180 240	230 330						
04	160 190 225	180 225	200 270	220 300	250 355	280 420	300 450			
05	170 200 220	180 220	200 260	220 300	250 350	280 420	300 450	350 550	400 650	
1	190 220	210 250	240 320	250 350	275 390	300 430	380 590	400 630		
2	230 280	250 320	270 370	290 400	300 415	400 620	500 820			
3	250 300	270 340	290 380	320 440	380 560	420 640	500 800			
4	250 280	270 320	290 350	330 430	350 470	470 710				
5	295 345	310 375	350 450	380 500	420 590	460 660	500 745			
6	330 380	350 420	370 455	400 510	450 510	500 620	540 720	795		

Type GA with plain bearing $n_{\max.} = 1000 \text{ rpm}$ and type HA with needle bearing $n_{\max.} = 4000 \text{ rpm}$

Size	Dimensions [mm]										Spline shaft	D1		
	GA	HA	d _{1, d₂} [H7]	D	L ₂	C	L _{min. / L_{max.}} / X	B	a [JS9]	b	Q [H8]	SW [H8]		
01 GA	-	6	16	34	8	←	→	25	2	7,0	6	6	SW8	16
02 GA	-	8	16	40	11	←	→	25	2	9,0	8	8	SW8	16
03 GA	03 HA	10	22	48	12	←	→	30	3	11,4	10	10	11 x 14 Z6	22
04 GA	04 HA	12	25	56	13	←	→	40	4	13,8	12	12	13 x 16 Z6	26
05 GA	05 HA	14	28	60	14	←	→	40	5	16,3	14	14	13 x 16 Z6	29
1 GA	1 HA	16	32	68	16	←	as indicated by customer's request	40	5	18,3	16	16	16 x 20 Z6	32
2 GA	2 HA	18	36	74	17	←	→	40	6	20,8	18	18	18 x 22 Z6	37
3 GA	3 HA	20	42	82	18	←	→	45	6	22,8	20	20	21 x 25 Z6	42
4 GA	4 HA	22	45	95	22	←	→	50	6	24,8	22	22	23 x 28 Z6	47
5 GA	5 HA	25	50	108	26	←	L _{min. / L_{max.}}	50	8	28,3	25	25	26 x 32 Z6	52
6 GA	6 HA	30	58	122	29	←	→	60	8	33,3	30	30	32 x 38 Z8	58
7 GA	7 HA	35	70	140	35	←	→	70	10	38,3	-	-	36 x 42 Z8	70
8 GA	8 HA	40	80	160	39	←	→	80	12	43,3	-	-	42 x 48 Z8	80
9 GA	9 HA	50	95	190	46	←	→	90	14	53,8	-	-	46 x 54 Z8	95

Calculation of mounting lengths L and X (stroke)

$$\text{stroke } X \geq ((L_{\max.} - 2) \cdot (L_2 - B)) / 2$$

$$L_{\min.} \geq ((L_{\max.} + 2) \cdot (L_2 + B)) / 2$$

$$\text{Minimum dimension } L_{\min.} = L_2 + B + X + L_2$$

Ordering example:


3 GA	d ₁ = Ø20	d ₂ = Ø20 keyway DIN	550/650
Size/type of joint	Finish bore (H7)	Finish bore (H7), keyway to DIN 6885 sheet 1 (JS9)	Mounting length L _{min./L_{max.}}

Type X and XD acc. to DIN 808 with plain bearing (stainless steel 1.4301)




- Suitable for every application in the range of general engineering up to a maximum speed of 300 rpm
- Type X precision single joint
- Type XD precision double joint
- Maximum articulation angle 45° for each joint
- Available with finish bore H7 – on request with keyway, hexagon bore or square bore


Precision single joint X

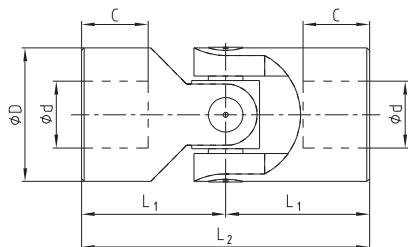

Precision double joint XD

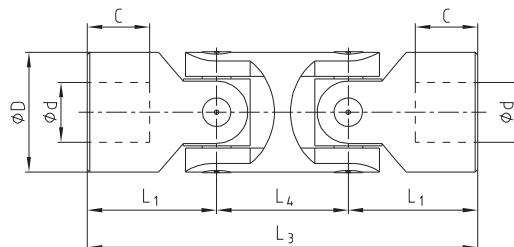

Finish bores:

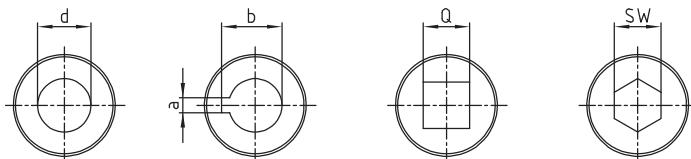


Type X and XD

Size X	Type and size			Dimensions [mm]											Weight [kg]	
	DIN description X	Size XD	DIN description XD	d [H7]	D	L2	L1	C	L4	L3	a [JS9]	b	Q [H8]	SW [H8]	X	XD
01 X	E6 x 16-G	01 XD	D6 x 16-G	6	16	34	17	8	22	56	2	7,0	6	6	0,05	0,08
02 X	E8 x 16-G	02 XD	D8 x 16-G	8	16	40	20	11	22	62	2	9,0	8	8	0,05	0,08
03 X	E10 x 22-G	03 XD	D10 x 22-G	10	22	48	24	12	26	74	3	11,4	10	10	0,10	0,15
04 X	E12 x 25-G	04 XD	D12 x 25-G	12	25	56	28	13	30	86	4	13,8	12	12	0,16	0,25
1 X	E16 x 32-G	1 XD	D16 x 32-G	16	32	68	34	16	36	104	5	18,3	16	16	0,30	0,45
3 X	E20 x 42-G	3 XD	D20 x 42-G	20	42	82	41	18	46	128	6	22,8	20	20	0,60	1,00
5 X	E25 x 50-G	5 XD	D25 x 50-G	25	50	108	54	26	55	163	8	28,3	25	25	1,20	2,00
6 X	E30 x 58-G	6 XD	D30 x 58-G	30	58	122	61	29	68	190	8	33,3	30	30	1,85	2,90


Ordering example:

04 X	Ø12	Ø12 keyway DIN
Size/type of joint	Finish bore (H7)	Finish bore (H7) feather keyway to DIN 6885 sh. 1 (JS9)

Type GR and HR with quick locking

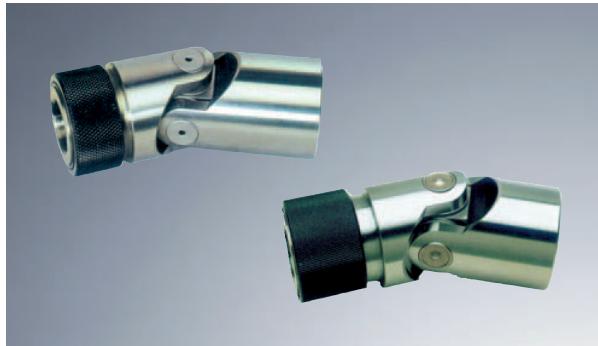


- Precision single joint with quick locking (separable)
- Type GR with plain bearing $n_{max.} = 1000$ rpm
- Type HR with needle bearing $n_{max.} = 4000$ rpm
- Maximum articulation angle 45°
- Quick locking (d_2) available with H7 bore and keyway to DIN 6885 sheet 1 – JS9 or hexagon bore

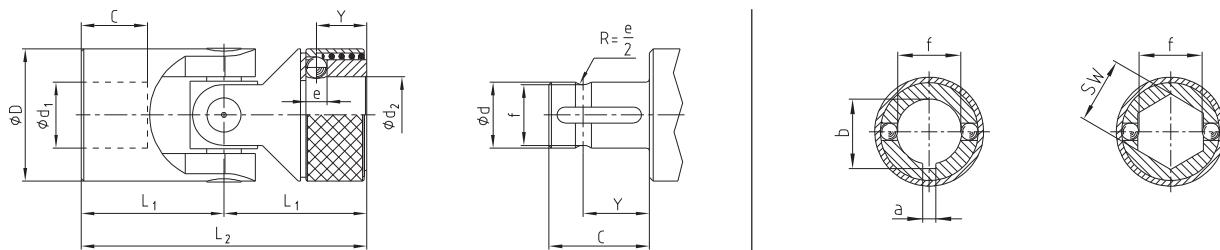

Type GR with plain bearing $n_{max.} = 1000$ rpm and type HR with needle bearing $n_{max.} = 4000$ rpm												
Size		Dimensions [mm]										
GR	HR	d_1, d_2 [H7]	D	L2	L1	C	Y	e	f	a [JS9]	b	SW [H8]
02 GR	-	8	16	52	26	14	9,5	3,5	7,0	2	9,0	8
03 GR	03 HR	10	22	62	31	17	11,5	4,0	8,7	3	11,0	10
04 GR	04 HR	12	25	74	37	21	13,5	4,0	11,0	4	13,3	12
05 GR	05 HR	14	25	74	37	21	13,5	4,0	13,0	5	15,3	14
1 GR	1 HR	16	32	86	43	24	14,0	6,35	14,8	5	17,3	16
2 GR	2 HR	18	36	96	48	28	19,0	8,0	16,0	6	19,8	18
3 GR	3 HR	20	42	108	54	31	19,0	8,0	18,0	6	22,3	20
4 GR	4 HR	22	45	120	60	34	20,5	10,0	20,0	6	24,8	22
5 GR	5 HR	25	50	132	66	38	20,5	10,0	23,0	8	28,3	25
6 GR	6 HR	30	58	166	83	49	25,0	10,0	28,0	8	33,3	30


Protection bush for joints type G, H, GA, HA and jX

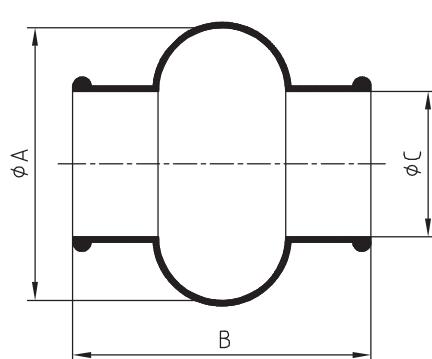

Protection bush			
Size	Precision joints	A	B
M 01	01 G, 01 X	28	34
M 02	02 G, 02 X	32	40
M 03	03 G, 03 H, 03 GA, 03 HA, 03 X	40	45
M 04	04 G, 04 H, 04 GA, 04 HA, 04 X	48	50
M 05	05 G, 05 H, 05 GA, 05 HA	52	56
M 1	1 G, 1 H, 1 GA, 1 HA, 1 X	56	65
M 2	2 G, 2 H, 2 GA, 2 HA	66	72
M 3	3 G, 3 H, 3 GA, 3 HA, 3 X	75	82
M 4	4 G, 4 H, 4 GA, 4 HA	84	95
M 5	5 G, 5 H, 5 GA, 5 HA, 5 X	92	108
M 6	6 G, 6 H, 6 GA, 6 HA, 6 X	100	122

Ordering example:	03 HR	$d_1 = \emptyset 10$	$d_2 = \emptyset 10$ keyway DIN
	Size/type of joint	Finish bore (H7)	Finish bore (H7) keyway to DIN 6885 sheet 1 (JS9)

Selection and determination of size acc. to DIN 808 with plain/needle bearing

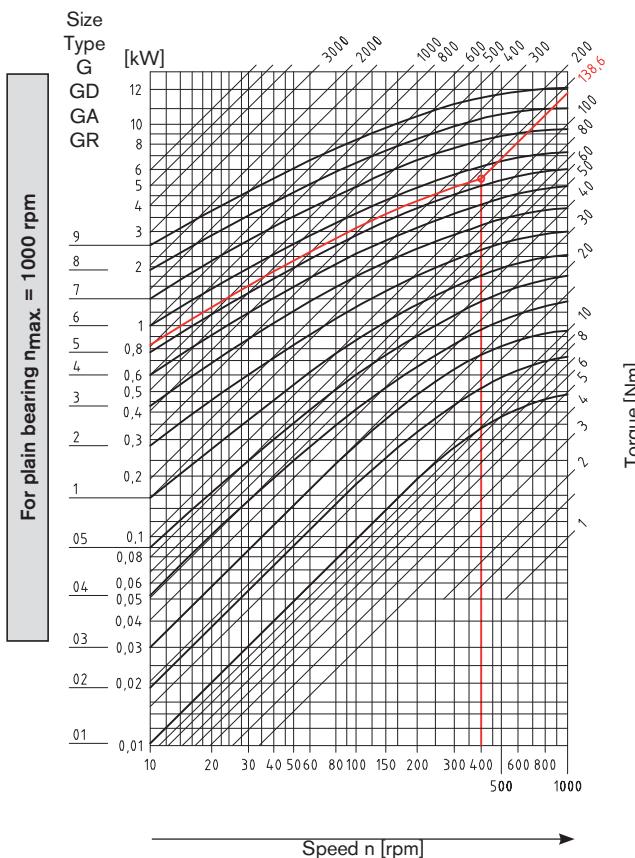

Selection of precision joints type G, GD, GA, GR (max. 1000 rpm)

Articulation angle [α]	Correction value
45°	4,0
40°	3,3
35°	2,6
30°	2,2
25°	1,8
20°	1,5
15°	1,25
10°	1,00
5°	0,8

The selection of the precision joints with plain bearing is based on the driving torque, taking into account a correction value which depends on the articulation angle α and the operating speed.

For the extendable joints in addition the overall length and the speed have to be considered to determine the size (please consult with KTR engineering department).


$$\text{Torque} \cdot \text{correction value} = \text{selected torque } M_t$$

Example of selection

Driving torque M_t [Nm]	Correction value for articulation angle [α]	Selected torque; Selection of size acc. to table
63	30°	
63	2,2	63 Nm · 2,2 = 138,6 Nm

Operating speed = 400 rpm

$$\text{Torque [Nm]} = 9550 \cdot \text{Power [kW]} / \text{speed [rpm]}$$

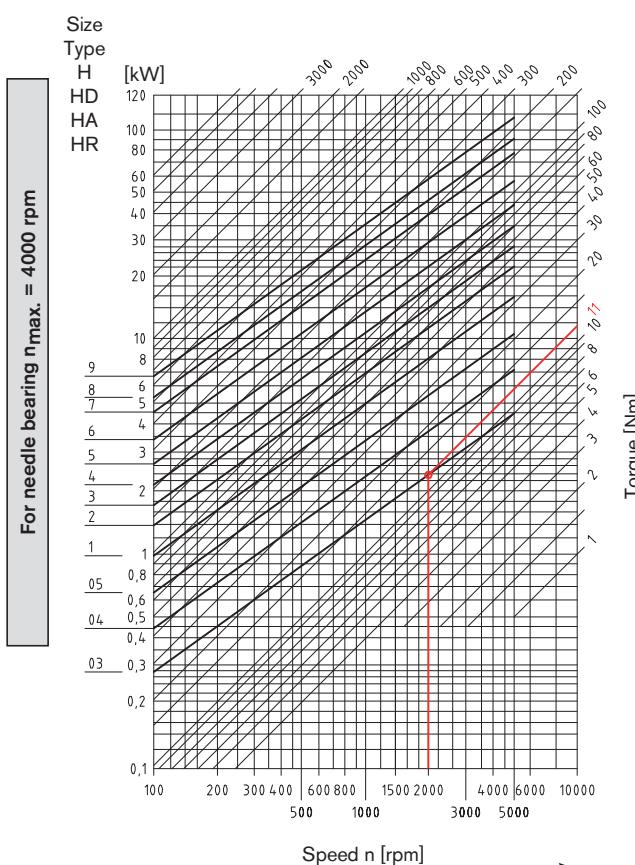

Selection of precision joints type H, HD, HA, HR (max. 4000 rpm)

Articulation angle [α]	Correction value
45°	4,0
40°	3,3
35°	2,5
30°	2,0
25°	1,4
20°	1,25
15°	1,1
10°	1,00
5°	0,8

The selection of the precision joints with needle bearing is based on the driving torque, taking into account a correction value which depends on the articulation angle α and the operating speed.

For the extendable joints in addition the overall length and the speed have to be considered to determine the size (please consult with KTR engineering department).

$$\text{Torque} \cdot \text{correction value} = \text{selected torque } M_t$$

Example of selection

Driving torque M_t [Nm]	Correction value for articulation angle [α]	Selected torque; Selection of size acc. to table
8,8	20°	
8,8	1,25	8,8 Nm · 1,25 = 11 Nm

Operating speed = 2000 rpm

The selection of the size according to the table is based on the driving torque (8,8 Nm) · correction value (20° = 1,25) = 11 Nm and the operating speed of 2000 rpm. Selected: Joint size 03

$$\text{Torque [Nm]} = 9550 \cdot \text{Power [kW]} / \text{speed [rpm]}$$