



Кулачковая упругая муфта типа HRC (FRC)

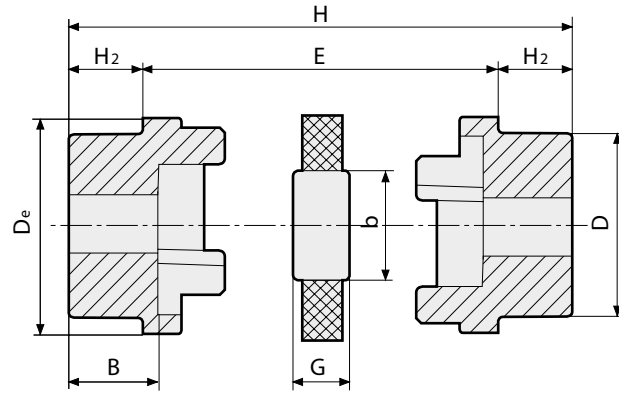

Тип	Максимальное отверстие под вал		Размеры								Kg
	MM	INS	De	D	b	E	G	H2	B	H	
70	32	1 1/4	69	60	31	25,0	18,0	20,0	23,5	65,0	1,20
90	42	1 5/8	85	70	32	30,5	22,5	26,0	30,0	82,5	2,15
110	55	2 1/8	112	100	45	45,0	29,0	37,0	45,0	119,0	6,10
130	60	2 3/8	130	105	50	53,0	36,0	47,0	55,5	147,0	8,90
150	70	2 3/4	150	115	62	60,0	40,0	50,0	60,0	160,0	12,20
180	80	3 1/8	180	125	77	73,0	49,0	58,0	70,0	189,0	18,40
230	100	4"	225	155	99	85,5	59,5	77,0	90,0	239,5	35,50
280	130	5"	275	206	119	105,5	74,5	90,0	105,5	285,5	71,50

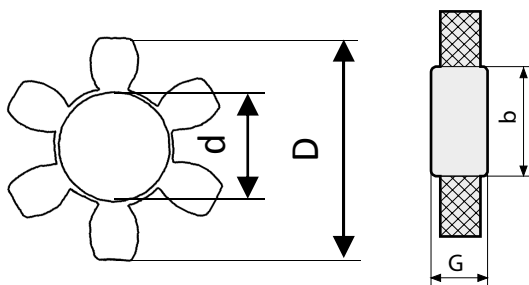

Тип	D (mm)	d (mm)	B (mm)	Крутящий момент, Nm
70	58	29	13	31,5
90	73	31	19	80
110	95	45	24,5	160
130	113	48,5	30	315
150	131,5	62	33	600
180	161	76	39	950
230	200	98	49	2000
280	n/a	n/a	n/a	3150